

250 Watt Pulse Start Lamp

37517 DATA SHEET



UNI-FORM
PULSE START METAL HALIDE LIGHTING SYSTEMS

MH 250W/U/PS/740 GENERAL Characteristics

| | |
|--------------------|-----------------------------|
| Lamp Type | MH Pulse Start Single Ended |
| ANSI Code | M138, M153/E |
| Bulb Shape | ED28 |
| Base Type | Mogul (E39) |
| Bulb Finish | Clear |
| Rated Life (V) | 20000 hours |
| Rated Life (H) | 15000 hours |
| Operating Position | Universal |

ELECTRICAL

| | |
|---------------------------|-----|
| Lamp Watts | 250 |
| Lamp Oper. Voltage (Nom.) | 133 |

SUSTAINABILITY

| | |
|---|------|
| Mercury Amount (mg) | 19.3 |
| Picograms of Hg per Mean Lumen Hour (V) | 45 |

PHOTOMETRIC


| | |
|------------------------------------|-------------------------|
| Initial Lumens / LPW (V) | 25000 / 100 |
| Initial Lumens / LPW (H) | 22500 / 90 |
| Lamp Lumen Depreciation (LLD) | 0.86 (86%) @ 8000 hours |
| Correlated Color Temperature | 4000K |
| Chromaticity Coordinates (CIE-x,y) | .385 .390 |
| Color Rendering Index (CRI) R_a | 68 |

PHYSICAL


| | |
|----------------------------|----------------|
| Bulb Diameter | 3.5" (90mm) |
| Max. Overall Length (MOL) | 8.3" (211mm) |
| Light Center Length (LCL) | 5.0" (127mm) |
| Effective Arc Length | 29.7mm |
| Max. Base Temperature (°C) | 210 |
| Max. Bulb Temperature (°C) | 400 |
| Socket Pulse Rating (KV) | 4 |
| Luminaire Type | Enclosed Rated |

NOTES

- Lamp performance ratings published in this data sheet are based upon operation with approved electronic ballasts.
- Nominal color temperature rating is based on Vertical ($\pm 15^\circ$) operation of the lamp. Off-vertical positions will result in higher color temperature.
- Minimum Starting Temperature: $-40^\circ\text{C}/^\circ\text{F}$.






ED28



Dia. = 3.5" (90mm)
MOL = 8.3" (211mm)
LCL = 5.0" (127mm)
Base = Mogul (E39)

Complies with (CE), Low Voltage (CE), WEEE and RoHS Directives

Warning: This lamp can cause skin burn and eye inflammation from shortwave ultraviolet radiation if outer envelope of the lamp is broken or punctured. Do not use where people will remain for more than a few minutes unless adequate shielding or other safety precautions are used. Lamps that will automatically extinguish when outer envelope is broken or punctured are commercially available.

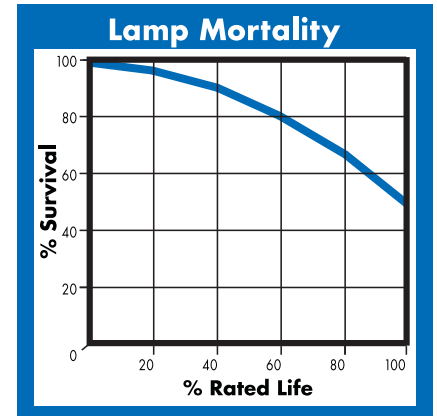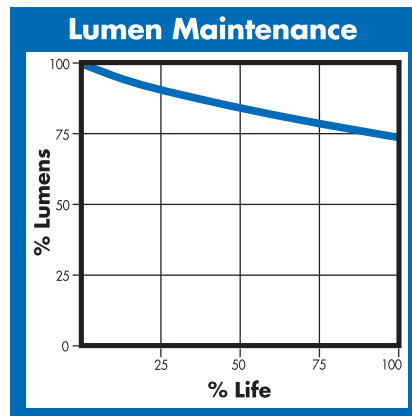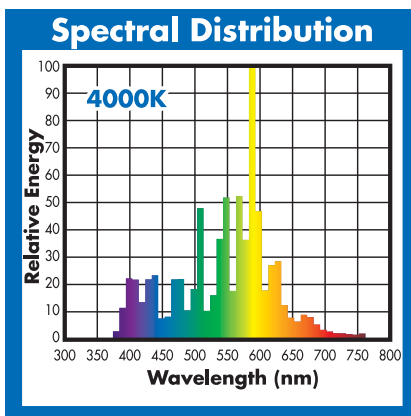

Venture Lighting Australia
110 Lewis Road Wantirna South VIC 3152
Ph: +61 3 9800 5600
sales@venturelighting.com.au
venturelighting.com.au

Venture Lighting New Zealand
8 Boeing Place Mount Maunganui
Ph: +64 07 579 0163
light@adlt.co.nz
venturelighting.co.nz

Venture Lighting Singapore
Ph: +65 6844 2338
sales@adlt.com.sg
venturelighting.com.sg