

# 400 Watt Pulse Start Lamp

# 59422

## DATA SHEET




**UNI-FORM**  
PULSE START METAL HALIDE LIGHTING SYSTEMS


### SUPER PULSE START

**Long Life (SPL)**

Extended Life Lamps



Vertical  $\pm 15^\circ$



Dia. = 3.1" (76mm)  
MOL = 11.5" (292mm)  
LCL = 7.0" (178mm)  
Base = Mogul (EX39)

## MPL 400W/C/V/T25/PS/737

### GENERAL Characteristics

Lamp Type	MH Pulse Start Single Ended
ANSI Code	M135, M155/0
Bulb Shape	T25
Base Type	Mogul (EX39)
Bulb Finish	Coated
Rated Life	40000 hours
Operating Position	Vertical $\pm 15^\circ$

### ELECTRICAL

Lamp Watts	400
Lamp Oper. Voltage (Nom.)	135

### SUSTAINABILITY

Mercury Amount (mg)	70.0
Picograms of Hg per Mean Lumen Hour	52

### PHOTOMETRIC

Initial Lumens	39000
Lumens Per Watt	98
Lamp Lumen Depreciation (LLD)	0.86 (86%) @ 16000 hours
Correlated Color Temperature	3700K
Chromaticity Coordinates (CIE-x,y)	.395 .390
Color Rendering Index (CRI) $R_a$	70

### PHYSICAL




Bulb Diameter	3.1" (76mm)
Max. Overall Length (MOL)	11.5" (292mm)
Light Center Length (LCL)	7.0" (178mm)
Effective Arc Length	N/A
Max. Base Temperature ( $^\circ\text{C}$ )	230
Max. Bulb Temperature ( $^\circ\text{C}$ )	525
Socket Pulse Rating (KV)	4
Luminaire Type	Open / Enclosed Rated

### NOTES

- Lamp performance ratings published in this data sheet are based upon operation with approved electronic ballasts.
- Operation of position-rated lamps outside of their tolerances will result in poor performance.
- Minimum Starting Temperature:  $-40^\circ\text{C}/^\circ\text{F}$ .
- To calculate nighttime Scotopic lumens, multiply the lumen rating by the S/P ratio (1.7).

Complies with (CE), Low Voltage (CE), WEEE and RoHS Directives

**Warning:** This lamp can cause skin burn and eye inflammation from shortwave ultraviolet radiation if outer envelope of the lamp is broken or punctured. Do not use where people will remain for more than a few minutes unless adequate shielding or other safety precautions are used. Lamps that will automatically extinguish when outer envelope is broken or punctured are commercially available.

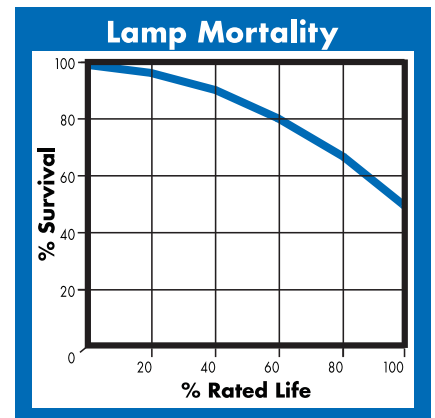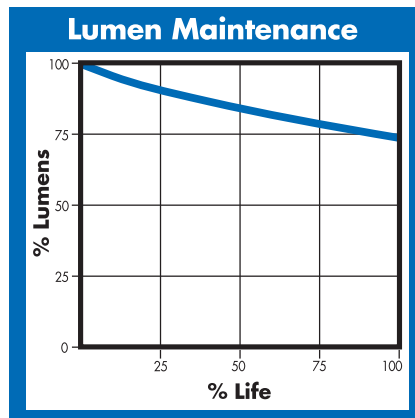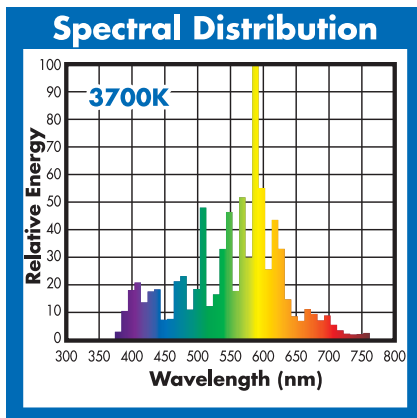

Venture Lighting Australia  
110 Lewis Road Wantirna South VIC 3152  
Ph: +61 3 9800 5600  
sales@venturelighting.com.au  
venturelighting.com.au

Venture Lighting New Zealand  
8 Boeing Place Mount Maunganui  
Ph: +64 07 579 0163  
light@adlt.co.nz  
venturelighting.co.nz

Venture Lighting Singapore  
Ph: +65 6844 2338  
sales@adlt.com.sg  
venturelighting.com.sg