

1000 Watt Pulse Start Lamp

71722 DATA SHEET



UNI-FORM
PULSE START METAL HALIDE LIGHTING SYSTEMS

MS 1000W/BU/BT37/PS/740

GENERAL Characteristics

Lamp Type	MH Pulse Start Single Ended
ANSI Code	M141/E
Bulb Shape	BT37
Base Type	Mogul (E39)
Bulb Finish	Clear
Rated Life	12000 hours
Operating Position	Base Up $\pm 15^\circ$

ELECTRICAL

Lamp Watts	1000
Lamp Oper. Voltage (Nom.)	263

SUSTAINABILITY


Mercury Amount (mg)	151.0
Picograms of Hg per Mean Lumen Hour	146

PHOTOMETRIC


Initial Lumens	115000
Lumens Per Watt	115
Lamp Lumen Depreciation (LLD)	0.75 (75%) @ 4800
Correlated Color Temperature	4000K
Chromaticity Coordinates (CIE-x,y)	.385 .390
Color Rendering Index (CRI) R_a	68

PHYSICAL

Bulb Diameter	4.6" (120mm)
Max. Overall Length (MOL)	11.5" (292mm)
Light Center Length (LCL)	7.0" (178mm)
Effective Arc Length	81.5 mm
Max. Base Temperature ($^\circ\text{C}$)	250
Max. Bulb Temperature ($^\circ\text{C}$)	450
Socket Pulse Rating (KV)	4
Luminaire Type	Enclosed Rated



BT37






Dia. = 4.6" (120mm)
MOL = 11.5" (292mm)
LCL = 7.0" (178mm)
Base = Mogul (E39)

NOTES

- Lamp performance ratings published in this data sheet are based upon operation with magnetic ballasts.
- Operation of position-rated lamps outside of their tolerances will result in poor performance.
- Minimum Starting Temperature: $-40^\circ\text{C}/^\circ\text{F}$.
- To calculate nighttime Scotopic lumens, multiply the lumen rating by the S/P ratio (1.7).

Warning: This lamp can cause skin burn and eye inflammation from shortwave ultraviolet radiation if outer envelope of the lamp is broken or punctured. Do not use where people will remain for more than a few minutes unless adequate shielding or other safety precautions are used. Lamps that will automatically extinguish when outer envelope is broken or punctured are commercially available.

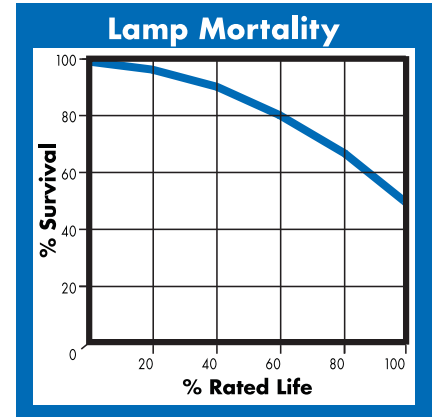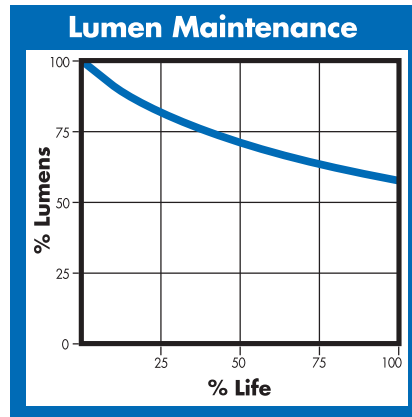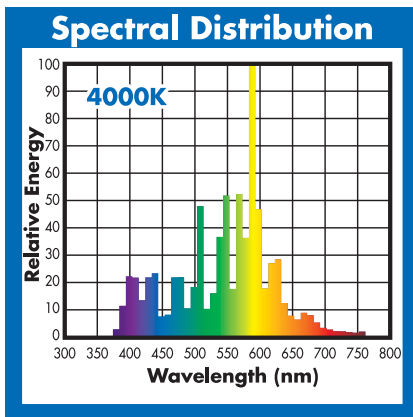

Venture Lighting Australia
110 Lewis Road Wantirna South VIC 3152
Ph: +61 3 9800 5600
sales@venturelighting.com.au
venturelighting.com.au

Venture Lighting New Zealand
8 Boeing Place Mount Maunganui
Ph: +64 07 579 0163
light@adlt.co.nz
venturelighting.co.nz

Venture Lighting Singapore
Ph: +65 6844 2338
sales@adlt.com.sg
venturelighting.com.sg