

# 450 Watt Pulse Start Lamp

# 59216 DATA SHEET



**UNI-FORM**  
PULSE START METAL HALIDE LIGHTING SYSTEMS

## MP 450W/C/BU/PS/737

### GENERAL Characteristics

Lamp Type	MH Pulse Start Single Ended
ANSI Code	M144/O
Bulb Shape	ED37
Base Type	Mogul (EX39)
Bulb Finish	Coated
Rated Life	30000 hours
Operating Position	Base Up $\pm 15^\circ$

### ELECTRICAL

Lamp Watts	450
Lamp Oper. Voltage (Nom.)	135

### SUSTAINABILITY


Mercury Amount (mg)	61.0
Picograms of Hg per Mean Lumen Hour	53

### PHOTOMETRIC


Initial Lumens	45000
Lumens Per Watt	100
Lamp Lumen Depreciation (LLD)	0.86 (86%) @ 8000
Correlated Color Temperature	3700K
Chromaticity Coordinates (CIE-x,y)	.395 .390
Color Rendering Index (CRI) $R_a$	70

### PHYSICAL

Bulb Diameter	4.6" (120mm)
Max. Overall Length (MOL)	11.5" (292mm)
Light Center Length (LCL)	7.0" (178mm)
Effective Arc Length	N/A
Max. Base Temperature ( $^\circ\text{C}$ )	230
Max. Bulb Temperature ( $^\circ\text{C}$ )	450
Socket Pulse Rating (KV)	4
Luminaire Type	Open / Enclosed Rated



**ED37**






Dia. = 4.6" (120mm)  
MOL = 11.5" (292mm)  
LCL = 7.0" (178mm)  
Base = Mogul (EX39)

### NOTES

- Lamp performance ratings published in this data sheet are based upon operation with approved electronic ballasts.
- Operation of position-rated lamps outside of their tolerances will result in poor performance.
- Minimum Starting Temperature:  $-40^\circ\text{C}/^\circ\text{F}$ .
- To calculate nighttime Scotopic lumens, multiply the lumen rating by the S/P ratio (1.7).

Complies with (CE), Low Voltage (CE), WEEE and RoHS Directives

**Warning:** This lamp can cause skin burn and eye inflammation from shortwave ultraviolet radiation if outer envelope of the lamp is broken or punctured. Do not use where people will remain for more than a few minutes unless adequate shielding or other safety precautions are used. Lamps that will automatically extinguish when outer envelope is broken or punctured are commercially available.

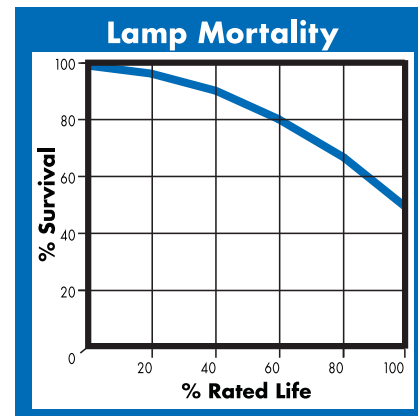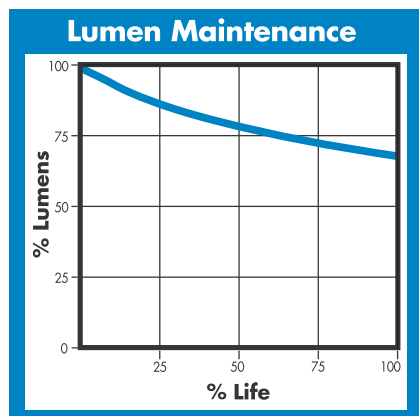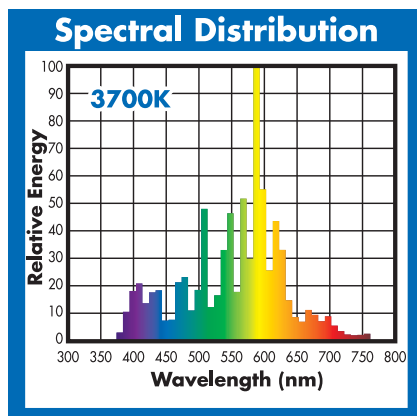

**Venture Lighting Australia**  
110 Lewis Road Wantirna South VIC 3152  
Ph: +61 3 9800 5600  
sales@venturelighting.com.au  
venturelighting.com.au

**Venture Lighting New Zealand**  
8 Boeing Place Mount Maunganui  
Ph: +64 07 579 0163  
light@adlt.co.nz  
venturelighting.co.nz

**Venture Lighting Singapore**  
Ph: +65 6844 2338  
sales@adlt.com.sg  
venturelighting.com.sg