

# 250 Watt Pulse Start Lamp

# 25028 DATA SHEET



**UNI-FORM**  
PULSE START METAL HALIDE LIGHTING SYSTEMS

## MP 250W/U/PS/740 GENERAL Characteristics

Lamp Type	MH Pulse Start Single Ended
ANSI Code	M138, M153/0
Bulb Shape	ED28
Base Type	Mogul (EX39)
Bulb Finish	Clear
Rated Life (V)	20000 hours
Rated Life (H)	15000 hours
Operating Position	Universal

## ELECTRICAL

Lamp Watts	250
Lamp Oper. Voltage (Nom.)	133

## SUSTAINABILITY

Mercury Amount (mg)	19.3
Picograms of Hg per Mean Lumen Hour (V)	47

## PHOTOMETRIC


Initial Lumens / LPW (V)	23800 / 95
Initial Lumens / LPW (H)	21400 / 86
Lamp Lumen Depreciation (LLD)	0.86 (86%) @ 8000 hours
Correlated Color Temperature	4000K
Chromaticity Coordinates (CIE-x,y)	.385 .390
Color Rendering Index (CRI) $R_a$	68

## PHYSICAL


Bulb Diameter	3.5" (90mm)
Max. Overall Length (MOL)	8.3" (211mm)
Light Center Length (LCL)	5.0" (127mm)
Effective Arc Length	29.7mm
Max. Base Temperature (°C)	210
Max. Bulb Temperature (°C)	400
Socket Pulse Rating (KV)	4
Luminaire Type	Open / Enclosed Rated

## NOTES

- Lamp performance ratings published in this data sheet are based upon operation with approved electronic ballasts.
- Nominal color temperature rating is based on Vertical ( $\pm 15^\circ$ ) operation of the lamp. Off-vertical positions will result in higher color temperature.
- Minimum Starting Temperature:  $-40^\circ\text{C}/^\circ\text{F}$ .






**ED28**



Dia. = 3.5" (90mm)  
MOL = 8.3" (211mm)  
LCL = 5.0" (127mm)  
Base = Mogul (EX39)

Complies with (CE), Low Voltage (CE), WEEE and RoHS Directives

**Warning:** This lamp can cause skin burn and eye inflammation from shortwave ultraviolet radiation if outer envelope of the lamp is broken or punctured. Do not use where people will remain for more than a few minutes unless adequate shielding or other safety precautions are used. Lamps that will automatically extinguish when outer envelope is broken or punctured are commercially available.

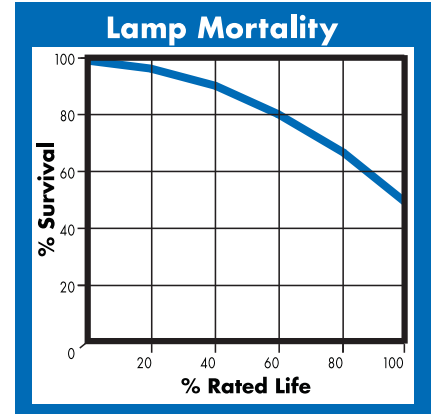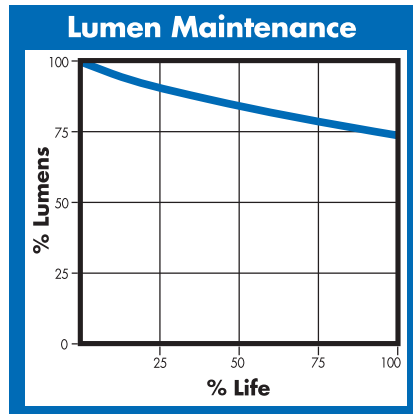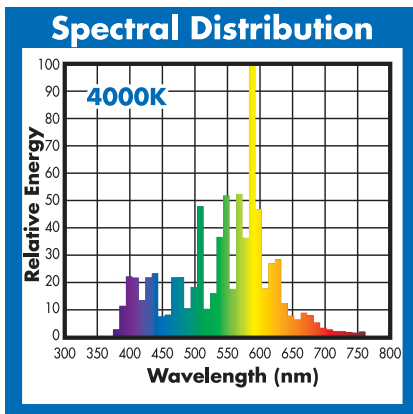

**Venture Lighting Australia**  
110 Lewis Road Wantirna South VIC 3152  
Ph: +61 3 9800 5600  
sales@venturelighting.com.au  
venturelighting.com.au

**Venture Lighting New Zealand**  
8 Boeing Place Mount Maunganui  
Ph: +64 07 579 0163  
light@adlt.co.nz  
venturelighting.co.nz

**Venture Lighting Singapore**  
Ph: +65 6844 2338  
sales@adlt.com.sg  
venturelighting.com.sg